



600 Series Hazardous Location Units

Meets New York City Requirements



Description

6 and 12 volt NEC Class I, Division 2 emergency lighting units designed for use in dusty or dirty areas. Units feature rugged fiberglass enclosure and gasketed construction.

Features

- Suitable for use in Class I, Division 2, Groups A,B,C & D, Zone 2, Groups IIA, IIB + H₂ and IIC areas as well as NEMA 3, 4X and 12 applications
- 6 and 12 volt models
- Sealed and gasketed construction
- Impact resistant, fiberglass reinforced polyester enclosure in industrial gray finish
- Built in viewing window in front cover for monitoring the AC indicator light and any optional metering devices
- Fully adjustable thermoplastic lighting heads with locking swivel assemblies
- Choice of maintenance-free lead calcium, or nickel cadmium battery models
- 90 Minutes of emergency illumination
- Universal 120/277VAC input
- Fully automatic battery charger standard
- Automatic low voltage battery disconnect protects battery from deep discharge
- Automatic brownout protection
- AC lockout feature reduces installation time
- Optional self-diagnostics available
- Momentary test switch and AC ready indicator
- Meets NFPA Life Safety Code 101, NEC, BOCA, OSHA, State and local Codes
- UL924 listed

Specifier Reference

Project: _____
 Fixture Type: _____
 Model No.: _____
 Comments: _____

Product Selector

Model No.	Volts	Watts 1 1/2 Hrs.	Watts 2 Hrs.	Watts 4 Hrs.	Watts 8 Hrs.	Battery Type	Standard Lamp*	Weight (Lbs.)
601 ⁽¹⁾⁽²⁾	6	25	19	12	--	nickel cadmium	-11	17
602 ⁽¹⁾⁽²⁾	6	50	37.5	24	8.5	nickel cadmium	-11	20
603 ⁽¹⁾	6	25	19	12	--	lead calcium	-11	17
604 ⁽¹⁾	6	50	37.5	24	8.5	lead calcium	-11	20
608 ⁽¹⁾⁽²⁾	12	25	19	12	--	nickel cadmium	-59	22
609 ⁽¹⁾⁽²⁾	12	50	37.5	24	8.5	nickel cadmium	-59	24
610 ⁽¹⁾⁽²⁾	12	75	56.5	28.5	18	nickel cadmium	-60	24
611 ⁽¹⁾⁽²⁾	12	100	75	48	17	nickel cadmium	-61	24
612 ⁽¹⁾⁽²⁾	12	125	94	60	21.5	nickel cadmium	-61	24
613 ⁽¹⁾	12	25	22	17	13	lead calcium	-59	22
614 ⁽¹⁾	12	50	40	30	24	lead calcium	-59	24


* Refer to Lamp Type Designator in Ordering Guide.

(1) Additionally listed to UL844 and UL1604

(2) Meets Class II, Div. 2, groups F & G requirements

NOTE: All product specifications shown are subject to change without notice.

Ordering Guide

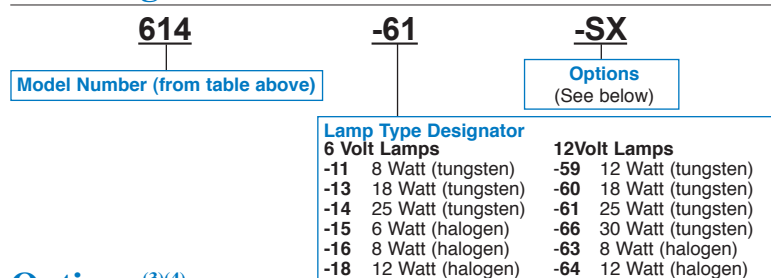

Options⁽³⁾⁽⁴⁾

Add Suffix	Description
-V	DC Voltmeter (not available in conjunction with -SX, -SXAL or -SXTD options)
-A	DC Ammeter (not available in conjunction with -SX, -SXAL or -SXTD options)
-L1Z	Unit With One Lighting Head Mounted
-L2Z	Unit Without Lighting Heads
-A1Z	Unit With Three Lighting Heads Mounted
-SX	Self-Diagnostics
-SXAL	Self-Diagnostics w/Alarm
-SXTD	Self-Diagnostics w/15-Min. Time Delay
-EX	Special Input Transformer (consult factory)
-S	Shatter Containment Lighting Head Lens
-TD120	15-Minute Retransfer Time Delay (120VAC)
-TD277	15-Minute Retransfer Time Delay (277VAC)

(3) Other options available. Consult factory.

(4) Some options may impact product UL listing. Consult factory.

Accessories

Order Model	Description
940-G-**	Matching Remote Lighting Head ⁽⁵⁾
MP1	Mounting Plate (single)
MP3	Mounting Plate (double)

(5) Add lamp type designator from table in Ordering Guide above. Ex.: 940-G-59

Construction

Impact resistant, industrial gray fiberglass reinforced polyester enclosure with stainless steel hardware is completely sealed and gasketed. The enclosure includes a built in window in the front cover for viewing the AC indicator light and any optional metering devices.

Lighting Heads: Impact resistant, UV stable, flame rated thermoplastic lamp housing and swivel assemblies in gray finish to match unit housing. Heads and swivels are sealed and gasketed. Lighting heads are fully adjustable and feature lockable swivels.

Installation

Mounting: Units are designed for installation to wall surfaces by means of internal knockouts or four external mounting feet provided with the enclosure.

Wiring: A wiring hub is provided on the right hand side of the enclosure for attachment of surface wiring conduit.

Illumination

High output sealed beam lamps provide glare-free light distribution.

Lamp Type: Par 36 sealed beam type

6 Volt Lamp Ratings: 8 to 30 watt tungsten, 8 or 12 watt halogen

12 Volt Lamp Ratings: 12 to 30 watt tungsten, 8 or 12 watt halogen

Lamp Life: 100 hours (expected average)

Code Information

All models are UL924 Listed and meet NFPA 101 Life Safety Code, NEC, OSHA, BOCA, state and local Codes.

ARRA Compliance

High-Lites 600 Series models are all in full compliance with the Buy American Act (41 U.S.C. § 10a - 10d) and the Buy American provisions of the American Recovery and Reinvestment (ARRA) act of 2009.

Charger and Electronics

Charger Type: Fully automatic and temperature compensating

Nickel Cadmium Models: Constant Current Type

Lead Calcium Models: Variable Rate Float Type

Utility Input: 120/277VAC, 60 Hz.

Power Consumption: 68 watts (maximum)

Temperature Range: 68°F to 86°F (20°C to 30°C) for lead calcium models and 20°F to 95°F (-7°C to 35°C) for nickel cadmium models

Recharge Duty Cycle: 24 hours

Load Transfer: All models utilize a solid state transfer circuit for load connection.

Controls: Momentary test switch and LED AC-On indicator light

Safety Circuitry:

AC Lockout: Prevents battery discharge prior to initial unit power-up saving installation time.

Low Voltage Battery Disconnect: Protects the battery from being severely damaged by deep discharge during prolonged power failures.


Short Circuit Protection: On units with solid state transfer, output protection is provided by a disconnect circuit that automatically resets itself when the fault condition is corrected.

Brownout Protection: Automatically switches the unit to emergency mode when AC voltage sags below 80% of nominal.

Emergency Operation

Upon failure of the normal utility power, a solid-state transfer switch automatically connects the unit's battery to the emergency lamp. Emergency illumination will be supplied for a minimum of 90 minutes. During emergency operation, the unit battery is protected from severe discharge damage by an automatic low voltage disconnect circuit that discontinues unit operation when battery voltage reaches 87.5% of nominal. When normal utility power is restored, the battery is automatically disconnected from the load and a recharging cycle begins that will return the battery to full capacity within 24 hours.

Dimensions

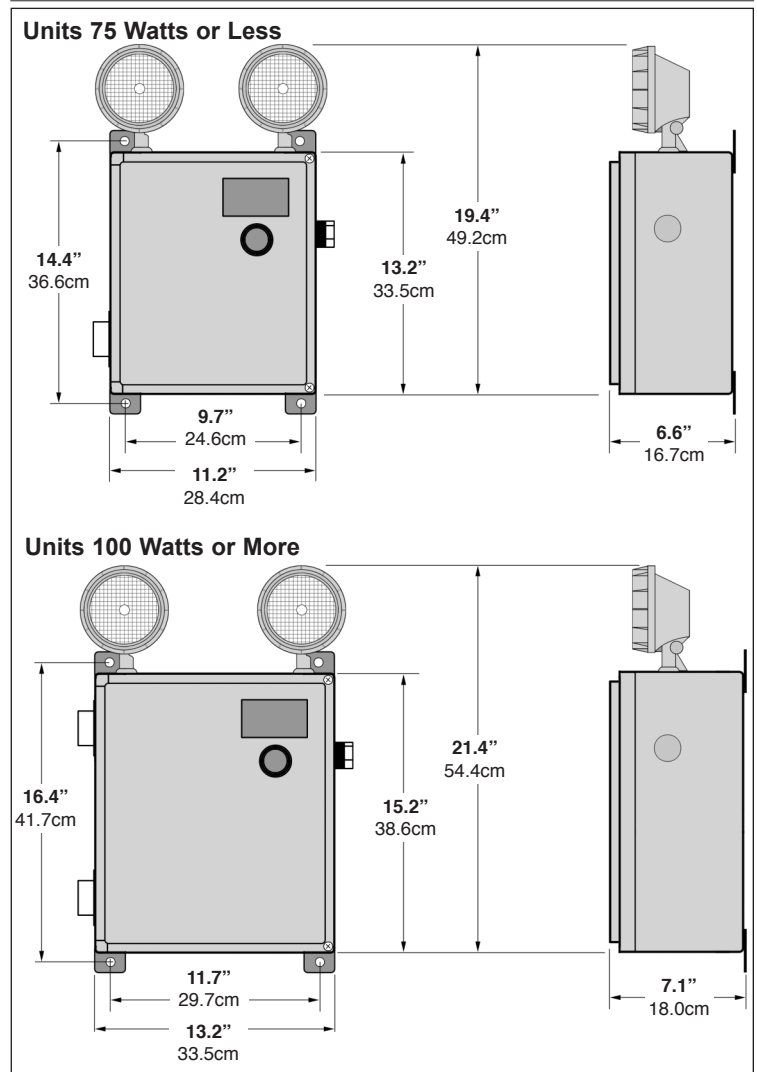

Optional Self-Diagnostic Circuit

Optional self-diagnostic (-SX) circuitry checks LED array, charger, battery and transformer operation every 10 seconds. A bi-color LED interface provides unit status and operational readiness information. Coded LED flash signals identify fault type if detected. Automatic diagnostic/discharge cycling includes a three-minute monthly test and a 30-minute test every six months. Manual test cycles from 1 to 90 minutes can be initiated at any time using the test switch. Self-diagnostic options are available in standard (-SX), alarm (-SXAL) and time delay (SXTD) configurations. The -SXAL alarm configuration provides an audible alarm signal in the event of a detected fault condition. The -SXTD time delay configuration provides a 15 minute re-transfer delay after the return of AC power following a utility failure to allow voltage stabilization and HID lighting to reach full illumination output before extinguishing the emergency lamps and returning the unit to the normal AC operating mode.

Battery

Sealed lead calcium or longest life sealed nickel cadmium maintenance free battery (depending on model) designed to provide many years of dependable service.

Warranty

Unit: (excluding lamps) 3-years full coverage against defects in materials and workmanship from date of shipment

Battery: 3 years full warranty plus an additional 7 years of pro-rata coverage